


TOILET ROOM ACCESSORIES SCHEDULE	
1	WALL MOUNTED SANITARY NAPKIN WASTE RECEPT.
2	WALL MOUNTED LIQUID SOAP DISPENSER
3	SURFACE MOUNTED TOILET TISSUE DISPENSER
4	36" LONG GRAB BAR HORIZONTAL
5	42" LONG GRAB BAR HORIZONTAL & 18" VERTICAL
6	WALL MOUNTED MIRROR
7	WALL MOUNTED PAPER TOWEL DISPENSER
8	WASTE RECEPTACLE

1 ENLARGED BATHROOM PLAN
1/2"=1'-0"

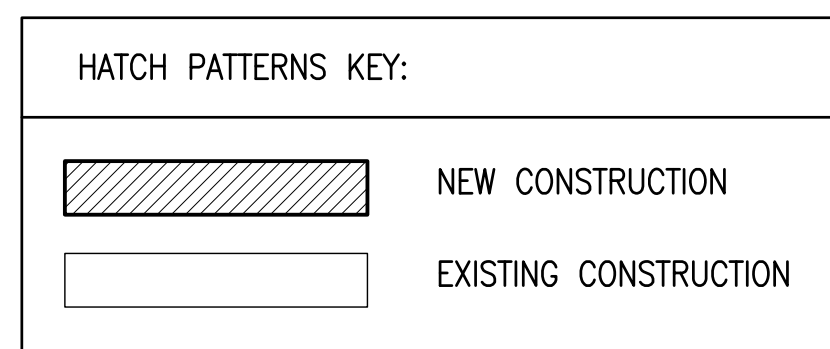


GENERAL NOTES:

- A. PROVIDE ADA APPROVED THRESHOLDS AT ALL NEW FLOOR TRANSITIONS AND DOORWAYS
- B. PATCH AND REPAIR ADJACENT WALLS AND FLOOR SURFACES TO PROVIDE A UNIFORM FINISH WHERE NECESSARY AT AREAS OF DEMOLITION, LOCATIONS OF REMOVED ACCESSORIES OR HARDWARE, AND ANY NEW OR RELOCATED WALLS. MATCH EXISTING FLOOR FINISHES, WALL FINISHES AND BASE MATERIALS UNLESS OTHERWISE SPECIFIED IN FINISH NOTES, PARTITION TYPE DETAILS OR ON PLANS.
- C. PROVIDE SAFETY GLAZING AT ALL DOORS PER CODE.
- D. EXTERIOR WALLS SHALL REMAIN INTACT AND UNDISTURBED. IF MODIFICATION IS NECESSARY, RESTORE TO EXISTING CONDITION AND EXISTING THERMAL ENVELOPE DESIGN.
- E. ELECTRICIAN TO VERIFY POWER AND DATA RECEPTACLE LOCATIONS, AND TO COORDINATE NEW LOCATIONS IN FIELD PER TENANT AND OWNER'S REQUEST.
- F. G.C. TO PROVIDE ALL REQUIRED FIRE DAMPERS OR OTHER SUITABLE PROTECTION DEVICES IN FIRE RATED WALLS WHICH ARE PERMITTED TO BE PENETRATED.
- G. CONFIRM EXISTING MECHANICAL, PLUMBING, ELECTRICAL OR DATA CONNECTIONS. WHERE EXISTING CONNECTIONS ARE ABANDONED DUE TO PROPOSED WORK, DEMOLITION WORK OR REMOVAL OF FIXTURES AND ACCESSORIES, CAP EXISTING CONNECTIONS AS REQUIRED PER CODE OR PROVIDE CONNECTION FOR NEW FIXTURES AND ACCESSORIES WHERE APPLICABLE.
- H. COORDINATE CONSTRUCTION SCHEDULE TO MINIMIZE IMPACT ON EXISTING BUILDING OPERATIONS AND ADJACENT TENANT SPACES.
- I. NEW CASEWORK TO MEET ACCESSIBILITY STANDARDS FOR REACH RANGE AND HEIGHTS.
- J. PROVIDE FIXTURES AND ACCESSORIES AT ACCESSIBLE MOUNTING HEIGHTS PER SCHEDULE.
- K. ALL DOORS TO BE 3'X7' SOLID WOOD DOORS WITH DOUBLE RABBET HM FRAMES UNLESS OTHERWISE NOTED

KEYED PLAN NOTES:

- 1 PROVIDE NEW PLASTIC LAMINATE UPPER CABINETS AND COUNTERTOP WITH U.C. REFRIGERATOR. PROVIDE ADEQUATE DUPLEX RECEPTACLES FOR ALL EQUIPMENT. COORDINATE WITH OWNER.
- 2 PROVIDE ADA COMPLIANT RESTROOM INCLUDING FIXTURES, GRAB BARS, AND ACCESSORIES. CONFIRM DEPTH OF WALL SINKS TO AVOID INTERFERENCE WITH CLEAR SPACE AT DOORS.
- 3 NEW PLASTIC LAMINATE RECEPTION COUNTER AT 30" A.F.F., AND TRANSACTION TOP AT 42" A.F.F., PROVIDE KNEE-CLEARANCE SUPPORT FROM MODESTY WALL. TENANT TO APPROVE FINAL DESIGN AND FINISH SELECTION.
- 4 PROVIDE 4-TIER 24"-DEEP LAMINATE WOOD STORAGE SHELVING ON SURFACE MOUNTED "KV" TYPE BRACKETS
- 5 NEW TENANT SUITE ENTRY DOOR, FRAME AND HARDWARE TO MATCH BUILDING STANDARD, PROVIDE 18" WIDE SIDELITE AND CLEAR SAFETY GLASS.
- 6 NEW 24"x24" FLOOR STANDING PVC SERVICE SINK AND FAUCET
- 7 STACKABLE WASHER AND DRYER, PROVIDE ALL NECESSARY PLUMBING AND ELECTRICAL, AND DRYER VENTING.
- 8 X-RAY EQUIPMENT, VERIFY SAFETY LEAD LINER REQUIREMENTS IN WALLS WITH AUTHORITIES AND ARCHITECT. TRACK MOUNTED FROM ABOVE. (TBD)
- 9 12" x 12" LEAD GLASS BORROWED LITE TO BE SALVAGED AND RELOCATED FROM TENANTS CURRENT SPACE.
- 10 PATCH EXISTING CARPET FLOORING. VERIFY IF ATTIC STOCK IS AVAILABLE FROM OWNER, OR PROVIDE COMPLIMENTARY/ MATCH
- 11 PROVIDE FINISHED AND PAINTED 1" CWB AT ALL EXT. WALLS OVER EXISTING VAPOR BARRIER & INSULATION (PATCH/ REPAIR AS NECESSARY)
- 12 36" MAX. HEIGHT OF TRANSACTION COUNTER FOR 36" OF COUNTERTOP

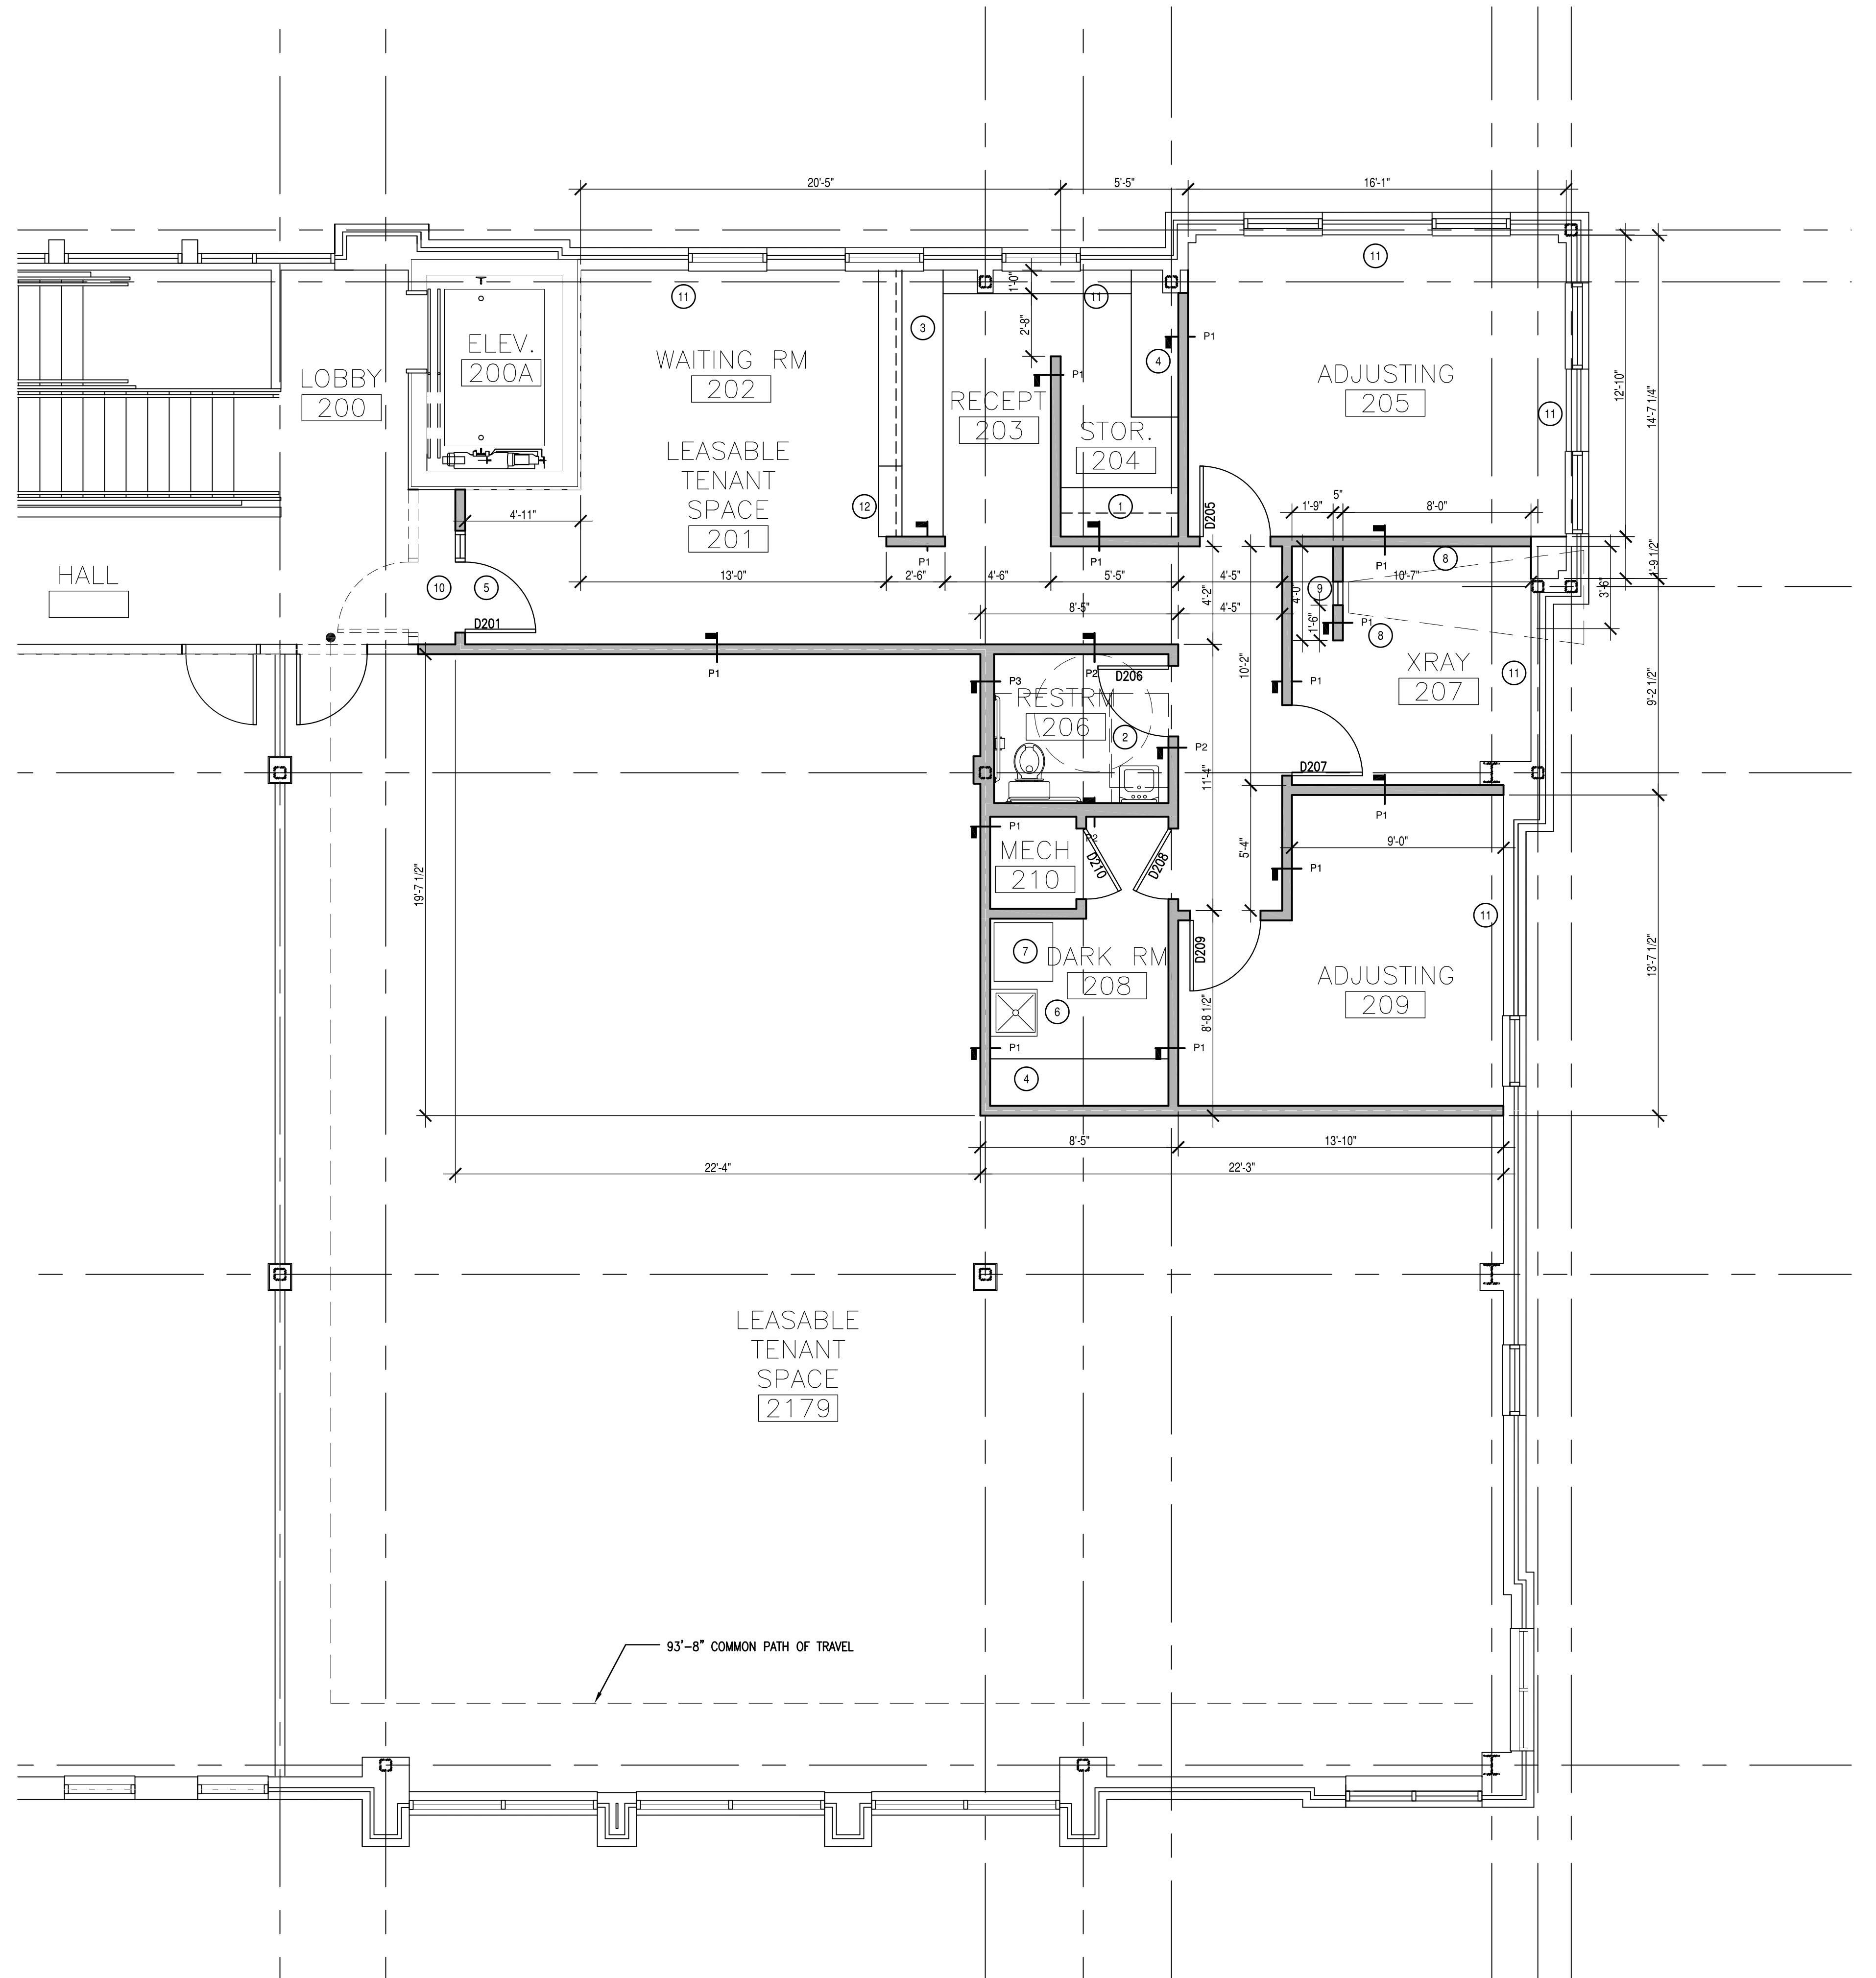

2 TENANT FLOOR PLAN
1/4"=1'-0"